

Conventional Ducting

Galvanised Roof Cowl	
D3-100	100mm dia.
D3-125	125mm dia.
D3-150	150mm dia.

Wall Outlet with Vanes	
D100	100mm dia.
D506	125mm dia.
D606	150mm dia.

Wall Cowl with Damper	
D102	100mm dia.
D502	125mm dia.
D602	150mm dia.

Wall or Ceiling Plate

D114-100	100mm dia. - White
D114-125	125mm dia. - White
D114-150	150mm dia. - White

Easipipe Connector with Damper

D494	100mm dia.
D594	125mm dia.
D694	150mm dia.

Round Ducting (900mm length)

D4G-100	100mm dia. Galvanised
D4W-100	100mm dia. White ducting
D4S-100	100mm dia. Stainless steel
D4P-100	100mm dia. Easipipe
D4G-125	125mm dia. Galvanised
D4W-125	125mm dia. White ducting
D4S-125	125mm dia. Stainless steel
D4P-125	125mm dia. Easipipe
D4G-150	150mm dia. Galvanised
D4W-150	150mm dia. White ducting
D4P-150	150mm dia. Easipipe

Reducer Expander

D118	125-150mm dia.
------	----------------

D544

D544	100-125mm dia.
------	----------------

Offset Reducer Expander

D644	100-125/150mm dia.
------	--------------------

90° Angle Bend

D490	Right Angle Bend 100mm
D590	Right Angle Bend 125mm
D690	Right Angle Bend 150mm

Louvre outlet

D104	100mm dia.
D504	125mm dia.
D604	150mm dia.

Retaining Clip (For use with Flexi Ducting)

D2	100-125mm dia.
D2-150	150mm dia.

Semi-rigid Aluminium Ducting


(1m length)		(3m length)	
D8-100-1	100mm dia.	D8-100-3	100mm dia.
D8-125-1	125mm dia.	D8-125-3	125mm dia.
D8-150-1	150mm dia.	D8-150-3	150mm dia.

Flexi Ducting

(3m length)		N.B Flexi Duct conforms to DIN 4102/B1, M1 (flame retardant)
D363	100mm dia.	
D563	125mm dia.	
D663	150mm dia.	

Galvanised Adjustable Elbow (In line through to 90)

D6-100	100mm dia.
D6-125	125mm dia.
D6-150	150mm dia.

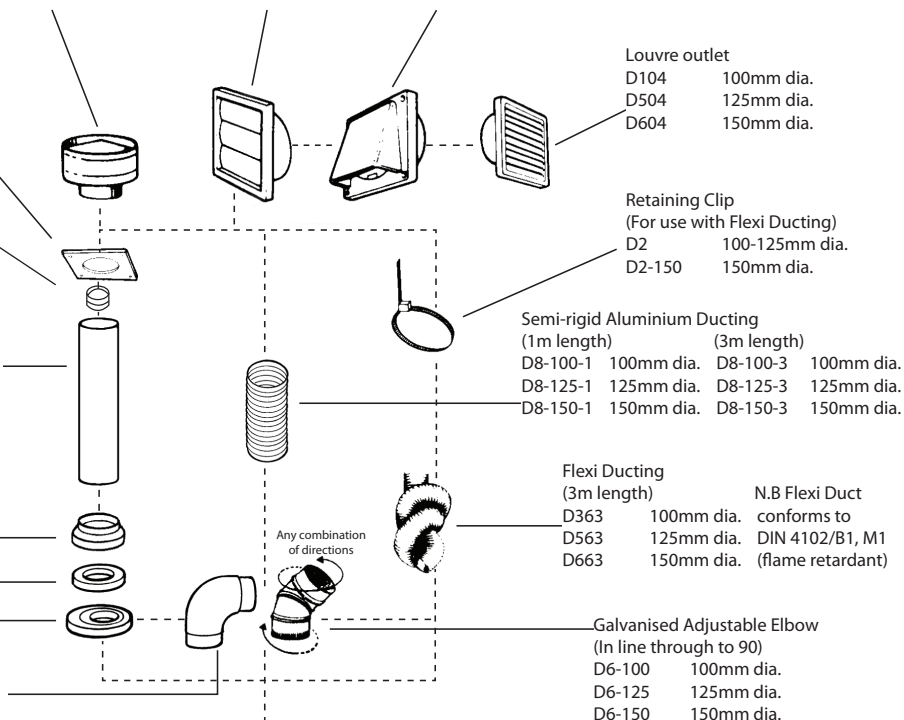

RANGEHOOD