

OVERVIEW

Installation and Operating Instructions

Model: RMKIT

For your convenience, we recommend to attach the serial number label HERE.

As part of Parmco Appliances commitment to improving and updating product ranges, we reserve the right to alter, change and update technical specifications and appearance attributes of all Parmco Appliances products. E&OE.

PARMCO

Inspiring kitchens, entertaining homes

p: 09 573 5678
f: 09 573 5699
e: sales@parmco.co.nz
w: www.parmco.co.nz

Parmco Appliances extended 7 year warranty



The Warranty:

- This appliance is intended for domestic use in the owners' home. Use of the appliance for commercial purposes will limit the warranty period (please see Parmco website for commercial details).
- Subject to the terms and conditions contained within this warranty, if the product is not of Acceptable Quality (as defined in the Consumer Guarantees Act) within 7 years of the date of original purchase, then Parmco Sales undertakes to repair or, at its sole discretion, replace the product.
- The warranty does not cover the costs of transport, mileage or travelling time if the product is located beyond 30km of a recognised Service Agent.
- This warranty is offered as an extra benefit, and does not affect other legal rights, which can not be modified or excluded by agreement.
- This warranty only applies to goods supplied and installed in the North and South Islands of New Zealand.
- The provisions of this warranty are in addition to the rights and remedies available to consumers under the Consumer Guarantees Act 1993.

Product _____ Date of purchase _____
Serial Number _____
Dealer / Retailers Name _____

Please retain this Warranty card together with receipt or other proof of purchase date when seeking service during the warranty period

Please contact Parmco at 09 573 5678 if your appliance needs servicing under warranty. Please have your model number and proof of purchase ready. Warranty repairs must be authorized by Parmco.

The Warranty is not valid:

- If the product is not installed and operated in accordance with the operating instructions.
- If the product is not installed to comply with the electrical, gas, plumbing and other Regulations and Codes of Practice in New Zealand.
- If the product is operated on voltages or frequencies outside the normal range for domestic appliances in New Zealand.
- If the product is not used in normal domestic use, or if it is used in a business as defined in the Consumer Guarantees Act.
- If any serial number has been removed or defaced.
- If proof of date of purchase is not supplied, except at the sole discretion of Parmco Sales. Proof of purchase can be for the product itself, or if installed with a kitchen or house then proof of purchase can be from a Parmco reseller of products supplied by Parmco.
- If the products are purchased in a second hand condition from other parties (including but not limited to TradeMe, Sella, etc.)

Liability under this warranty will not be accepted for:

- Wear and tear caused by normal domestic use of the product.
- Damage in transport.
- Damage caused to the product by neglect, abuse, negligence, wilful act or misuse.
- Any costs associated with the repair, replacement, removal or reinstallation of products installed in a damaged condition.
- Any defect caused by accident, misuse, neglect, tampering with or unauthorised modifications of the appliance or any attempt at internal adjustment or repair by any person other than an Authorised Service Agent.
- Service calls that relate principally to the following:
 - Instruction on how to use the product.
 - Repair or replacement of house fuses, electrical wiring, gas fitting or plumbing.
 - Normal or scheduled maintenance including blocked filters or ducting.
- Consumable items such as light bulbs.
- Any damage to hobs caused by spills when cooking.
- Any breakage or damage of glass items.
- Any damage caused by non recommended product used for cleaning, maintaining, lubricating or similar.
- Any aspect relating to the installation of the product, or damage caused during installation including blocked access for repair.
- Any third party (including reseller) or consequential loss or damage (direct or indirect) however arising.

Subject to updates without prior notice, please visit www.parmco.co.nz for the latest version.

E & O.E. 727626062017



Dear Valued Customer,

Thank you and congratulations on purchasing your new Parmco appliance.

All Parmco products are made to the highest quality and design standards. We are sure you will enjoy your new appliance.

As a note, please read through these instructions carefully. These will assist you in gaining a complete understanding of the functions and features offered by your appliance.

Please take special note of all detailed technical information and installation instructions. It is essential that you follow these instructions to ensure the safety and reliability of this appliance.

Furthermore, not using appropriate personnel to install this appliance may affect any future warranty claims lodged, so please check with Parmco Appliances before any installation is carried out.

We hope you enjoy your new appliance. If you would like to find out more about this product or any other products in Parmco's extensive range, visit us online at www.parmco.co.nz.



Regards,
The Parmco Team

PARMCO


Inspiring kitchens, entertaining homes

Schematic Diagram

1. Connect the cooker hood main body with the external chassis by control wire, to achieve power on and off, and also speed switching.
2. The control wire is separated into 3 parts, the first two parts are fixed onto the main body and external chassis, while the middle part is extension wire.
3. The cooker hood main body and the external chassis will exhaust the smoke to outdoor after installing the expansion pipe. Note: The external chassis is mounted on the ceiling and connected to the wall or roof vent.

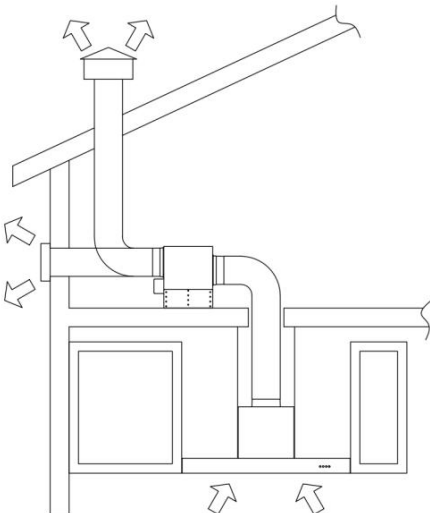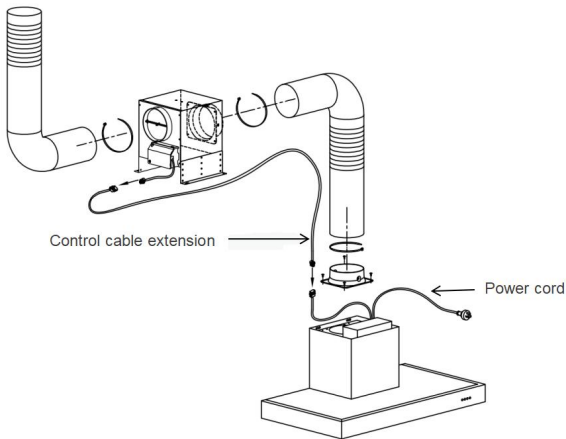

Exploded View

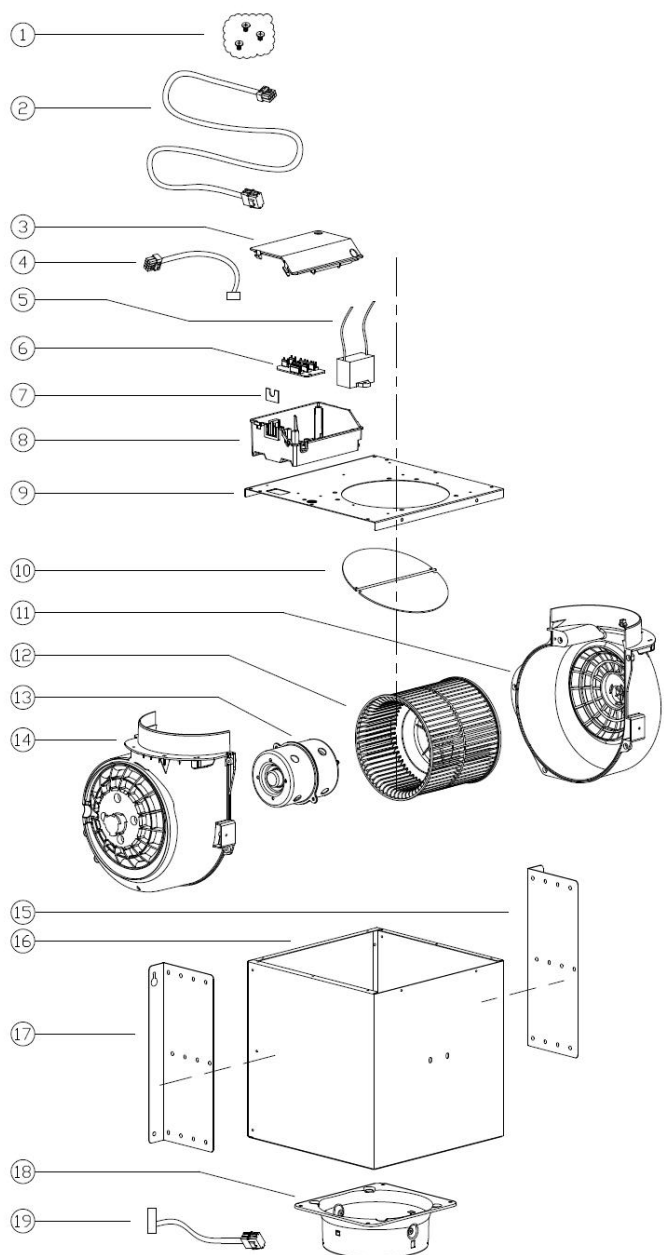


No.	Item
1	Screws kit
2	Extension cord C
3	Terminal box cover
4	Extension cord B
5	Capacitor (7uF/450V)
6	PCB
7	Terminal box seal cover
8	Terminal box
9	Chassis top plate
10	Flap
11+12+13+14	C109 Motor assembly
15	Right support feet
16	Motor chasing
17	Left support feet
18	150mm Metal outlet
19	Extension cord A

Installation

1. Before installation, turn the unit off and unplug it from the outlet.



2. The rangehood should be placed at a distance of 65 - 75cm above the cooking surface for best effect. See pic 1.





Pic 1

3. If the rangehood has already installed a motor, the motor and its wiring need to be took out first.
 - (1) Loosen the 2 screws of the terminal box cover and open the cover




- (2) Loosen the 1 screw on the pressure plate and pull out the original motor wire rubber plug from the hood

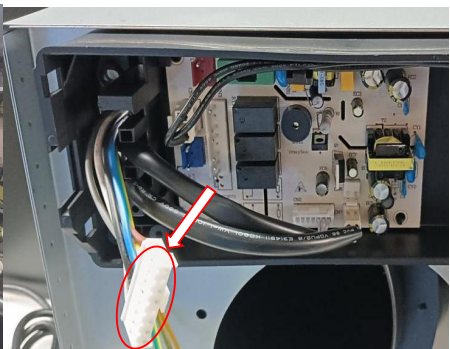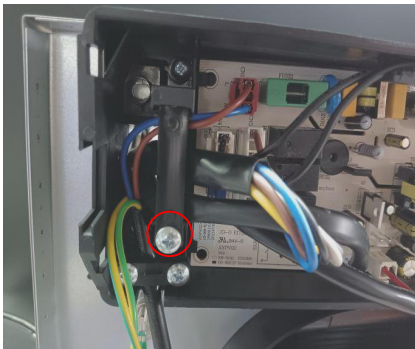


- (3) Loosen the nut on the motor earth wire, remove the motor wire from the rectangular hole at the bottom of the electrical box towards the inside of the chassis



- (4) Loosen the screws for mounting motor.

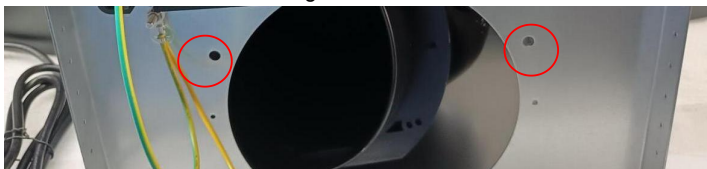


- (5) Plug the remote motor cable into the socket of the original motor cable, the electrical box of the motor cable leads from the left notch, and the crimp plate is mounted back to the original position.

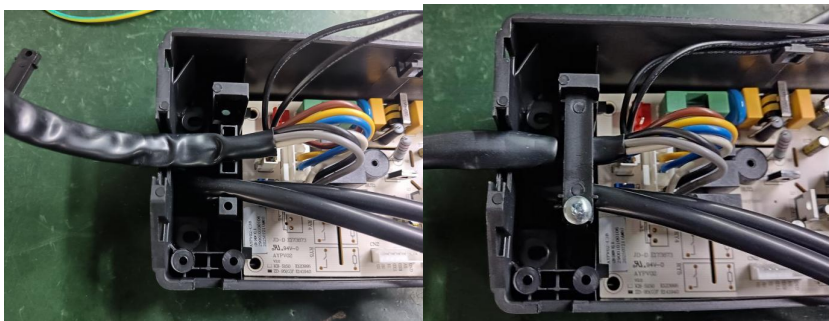


- (6) Install the earth wire of the motor extension cable in the position of the original motor earth wire and fix it with the original nut and spring washer.
(7) Put the terminal box cover back in place and drive screws to secure it.

4. Install the 150mm air outlet on top of the main body with four 4mm × 8mm screws, then connect the expansion pipe and secure it with cable ties. See pic 2. *(Expansion pipe is not included in the box)*

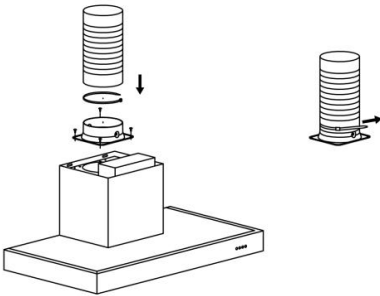


Pic 2

5. Connect the motor control cable of the main body to the extension cable A. See pic 3

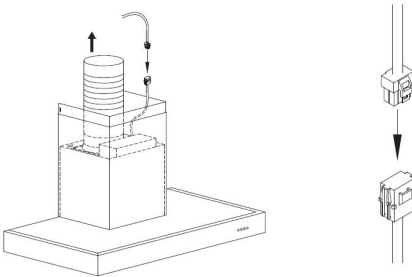


Pic 3

6. Install the remote motor:
Secure the left and right support feet to both sides of the external chassis using six 4mm x 8mm screws. See pic 4




Pic 4

7. Mount the external chassis to the ceiling using four 4mm x 30mm screws, see pic 5. Or fix it to the wall using four wall plugs and four 4mm x 30mm screws, see pic 6.




Pic 5




Pic 6

8. Extend the expansion pipe and connect it to the air outlet of the external chassis, securing it with cable ties. Connect the external chassis' control cable to the extension cable. Control cable name: motor extension cable B. See pic 7, pic 8.



Pic 7



Pic 8